


# SN54HC139, SN74HC139

## DUAL 2-LINE TO 4-LINE DECODERS/DEMULITPLEXERS

SCLS108A – DECEMBER 1982 – REVISED JANUARY 1996

- **Designed Specifically for High-Speed Memory Decoders and Data Transmission Systems**
- **Incorporate Two Enable Inputs to Simplify Cascading and/or Data Reception**
- **Package Options Include Plastic Small-Outline (D), Thin Shrink Small-Outline (PW), and Ceramic Flat (W) Packages, Ceramic Chip Carriers (FK), and Standard Plastic (N) and Ceramic (J) 300-mil DIPs**

**SN54HC139 . . . J OR W PACKAGE  
SN74HC139 . . . D, N, OR PW PACKAGE  
(TOP VIEW)**




### description

The 'HC139 are designed for high-performance memory-decoding or data-routing applications requiring very short propagation delay times. In high-performance memory systems, these decoders can minimize the effects of system decoding. When employed with high-speed memories utilizing a fast enable circuit, the delay time of these decoders and the enable time of the memory are usually less than the typical access time of the memory. This means that the effective system delay introduced by the decoders is negligible.

The 'HC139 comprise two individual 2-line to 4-line decoders in a single package. The active-low enable ( $\bar{G}$ ) input can be used as a data line in demultiplexing applications. These decoders/demultiplexers feature fully buffered inputs, each of which represents only one normalized load to its driving circuit.

The SN54HC139 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74HC139 is characterized for operation from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

**SN54HC139 . . . FK PACKAGE  
(TOP VIEW)**

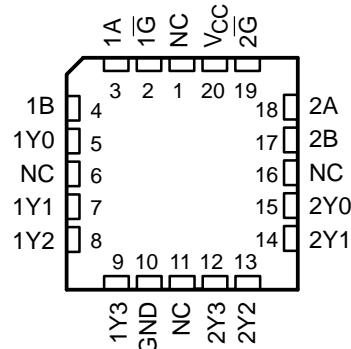

NC – No internal connection

**FUNCTION TABLE**

$\bar{G}$	INPUTS		OUTPUTS			
	SELECT		$Y_0$	$Y_1$	$Y_2$	$Y_3$
	B	A	H	H	H	H
H	X	X	H	H	H	H
L	L	L	L	H	H	H
L	L	H	H	L	H	H
L	H	L	H	H	L	H
L	H	H	H	H	H	L



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1996, Texas Instruments Incorporated




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# SN54HC139, SN74HC139 DUAL 2-LINE TO 4-LINE DECODERS/DEMULITPLEXERS


SCLS108A – DECEMBER 1982 – REVISED JANUARY 1996

## logic symbols (alternatives)<sup>†</sup>

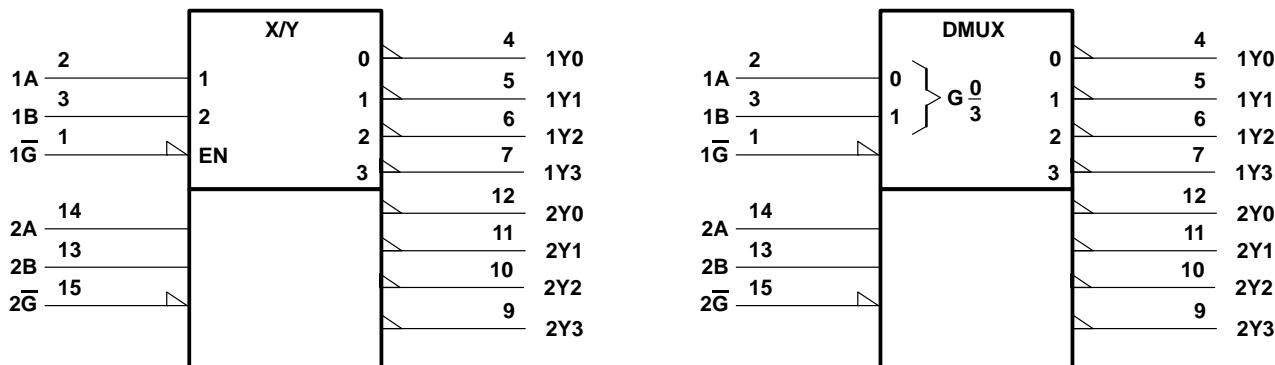

<sup>†</sup> These symbols are in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.  
Pin numbers shown are for the D, J, N, PW, and W packages.

## logic diagram (positive logic)

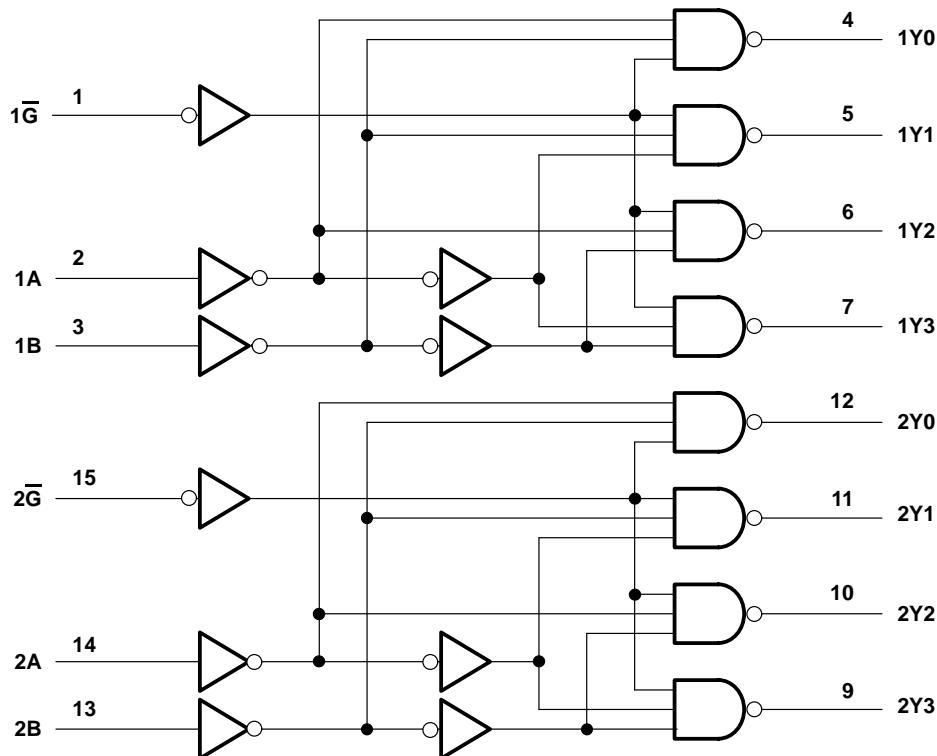

Pin numbers shown are for the D, J, N, PW, and W packages.

# SN54HC139, SN74HC139 DUAL 2-LINE TO 4-LINE DECODERS/DEMULITPLEXERS

SCLS108A – DECEMBER 1982 – REVISED JANUARY 1996

## absolute maximum ratings over operating free-air temperature range<sup>†</sup>

Supply voltage range, $V_{CC}$ .....	–0.5 V to 7 V		
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ) (see Note 1) .....	$\pm 20$ mA		
Output clamp current, $I_{OK}$ ( $V_O < 0$ or $V_O > V_{CC}$ ) (see Note 1) .....	$\pm 20$ mA		
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ ) .....	$\pm 25$ mA		
Continuous current through $V_{CC}$ or GND .....	$\pm 50$ mA		
Maximum power dissipation at $T_A = 55^\circ\text{C}$ (in still air) (see Note 2): D package .....	1.3 W		
	N package .....	1.1 W	
	PW package .....	0.5 W	
Storage temperature range, $T_{stg}$ .....	$-65^\circ\text{C}$ to $150^\circ\text{C}$		

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.  
 2. The maximum package power dissipation is calculated using a junction temperature of  $150^\circ\text{C}$  and a board trace length of 750 mils, except for the N package, which has a trace length of zero.

## recommended operating conditions

		SN54HC139			SN74HC139			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
$V_{CC}$	Supply voltage	2	5	6	2	5	6	V
$V_{IH}$	High-level input voltage	$V_{CC} = 2$ V	1.5		1.5			V
		$V_{CC} = 4.5$ V	3.15		3.15			
		$V_{CC} = 6$ V	4.2		4.2			
$V_{IL}$	Low-level input voltage	$V_{CC} = 2$ V	0	0.5	0	0.5		V
		$V_{CC} = 4.5$ V	0	1.35	0	1.35		
		$V_{CC} = 6$ V	0	1.8	0	1.8		
$V_I$	Input voltage	0	$V_{CC}$	0	$V_{CC}$	0	$V_{CC}$	V
$V_O$	Output voltage	0	$V_{CC}$	0	$V_{CC}$	0	$V_{CC}$	V
$t_t$	Input transition (rise and fall) time	$V_{CC} = 2$ V	0	1000	0	1000		ns
		$V_{CC} = 4.5$ V	0	500	0	500		
		$V_{CC} = 6$ V	0	400	0	400		
$T_A$	Operating free-air temperature	–55		125	–40		85	$^\circ\text{C}$

# SN54HC139, SN74HC139 DUAL 2-LINE TO 4-LINE DECODERS/DEMULITPLEXERS

SCLS108A – DECEMBER 1982 – REVISED JANUARY 1996

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	V <sub>CC</sub>	T <sub>A</sub> = 25°C			SN54HC139	SN74HC139	UNIT
			MIN	TYP	MAX	MIN	MAX	
V <sub>OH</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OH</sub> = -20 µA	2 V	1.9	1.998	1.9	1.9	V
			4.5 V	4.4	4.499	4.4	4.4	
			6 V	5.9	5.999	5.9	5.9	
		I <sub>OH</sub> = -4 mA	4.5 V	3.98	4.3	3.7	3.84	
		I <sub>OH</sub> = -5.2 mA	6 V	5.48	5.8	5.2	5.34	
V <sub>OL</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>OL</sub> = 20 µA	2 V	0.002	0.1	0.1	0.1	V
			4.5 V	0.001	0.1	0.1	0.1	
			6 V	0.001	0.1	0.1	0.1	
		I <sub>OL</sub> = 4 mA	4.5 V	0.17	0.26	0.4	0.33	
		I <sub>OL</sub> = 5.2 mA	6 V	0.15	0.26	0.4	0.33	
I <sub>I</sub>	V <sub>I</sub> = V <sub>CC</sub> or 0		6 V	±0.1	±100	±1000	±1000	nA
I <sub>CC</sub>	V <sub>I</sub> = V <sub>CC</sub> or 0, I <sub>O</sub> = 0		6 V		8	160	80	µA
C <sub>i</sub>			2 V to 6 V	3	10	10	10	pF


**switching characteristics over recommended operating free-air temperature range, C<sub>L</sub> = 50 pF (unless otherwise noted) (see Figure 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub>	T <sub>A</sub> = 25°C			SN54HC139	SN74HC139	UNIT
				MIN	TYP	MAX	MIN	MAX	
t <sub>pd</sub>	A or B	Y	2 V	47	175	255	220		ns
			4.5 V	14	35	51	44		
			6 V	12	30	44	38		
	G̅	Y	2 V	39	175	255	220		
			4.5 V	11	35	51	44		
			6 V	10	30	44	38		
t <sub>t</sub>		Y	2 V	38	75	110	95		ns
			4.5 V	8	15	22	19		
			6 V	6	13	19	16		

**operating characteristics, T<sub>A</sub> = 25°C**

PARAMETER	TEST CONDITIONS	TYP	UNIT
C <sub>pd</sub> Power dissipation capacitance per decoder	No load	25	pF

### PARAMETER MEASUREMENT INFORMATION

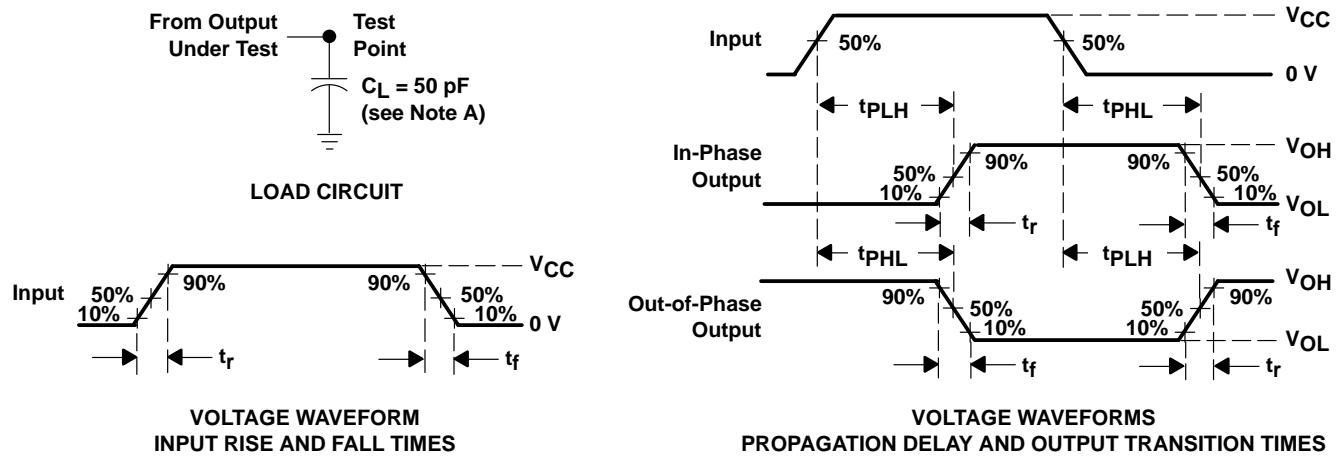

- NOTES:
- $C_L$  includes probe and test-fixture capacitance.
  - Phase relationships between waveforms were chosen arbitrarily. All input pulses are supplied by generators having the following characteristics: PRR  $\leq 1 \text{ MHz}$ ,  $Z_O = 50 \Omega$ ,  $t_r = 6 \text{ ns}$ ,  $t_f = 6 \text{ ns}$ .
  - The outputs are measured one at a time with one input transition per measurement.
  - $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{pd}$ .

Figure 1. Load Circuit and Voltage Waveforms