


PRF15/18 Series Chip POSISTOR[®] for Overheat Sensing

PRF15/18 PTC Chip thermistors detect overheating of Hybrid ICs, Power Transistors, Power Diodes and Power ICs etc.

1.0402 and 0603 light weight


- 2. High gain simplifies circuit design
- 3. Free of contact noise and problems
- 4. Pb free plated terminations.
- Sturdy construction resists mechanical vibratio and shock.

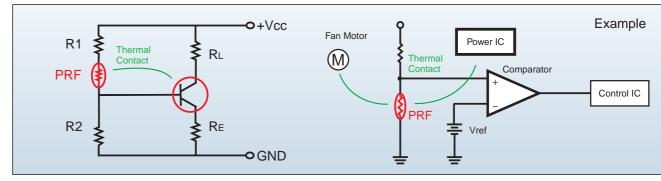


PRF15 Series Characteristics

	Jew S						
4	Part Number	Characteristics	Resistance (at +25°C)		Sensing Temp. (at 4.7k ohm)	Maximum Voltage	Operating Tem
	PRF15BA471QB1RC	BA			125±5°C		-20 to +140°C
	PRF15BB471QB1RC	BB	470ohm ±50%		115±5°C	32VDC	-20 to +130°C
	PRF15BC471QB1RC	BC			105±5°C		-20 to +120°C
	Dimensions $0.1-0.4 \leftarrow 0.5\pm 0.05$ 0.5 ± 0.05 0.5 ± 0.05 0.5 ± 0.05				Electrode Construction Cross-sectiona		
	1.0±0.05	0.5±0.05	(in mm)		N	ickel Barrier	Sn Plating



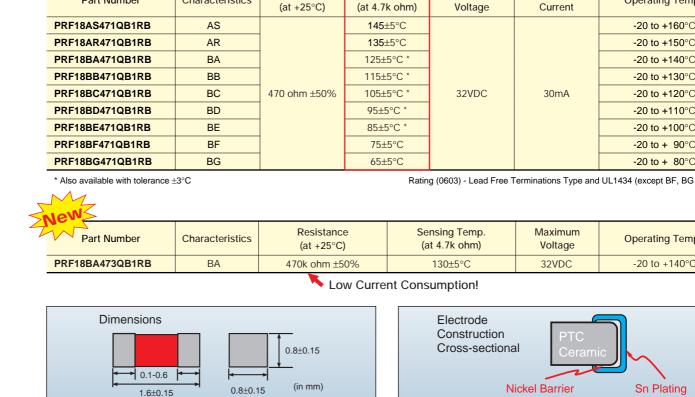

Circuit Examples

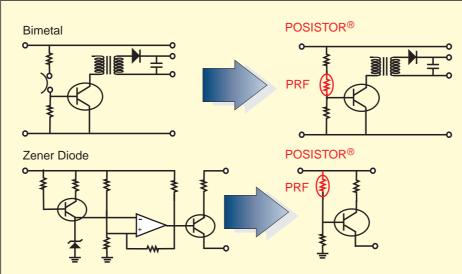

	Zener Diode		POSISTOR®			
Mounting Area	10x10 = 100	10x10 = 100mm ²		6x6 = 36mm ²		
Parts	Parts	UPS	Parts	UPS		
	Diode	1	POSISTOR®	1		
	Transistor	2	Transistor	1		
	Resistor	7	Resistor	2		
	Op. Amp.	1	Op. Amp.	0		
	Total	11	Total	4		

The POSISTOR[®] has the following advantages over Bimetal devices.

- 1. Noise free
- 2. No contact problems
- 3. Low price

The POSISTOR[®] has the following additional advan over Zener Diodes.

1. Reduced numbers of paused in circuits

2. Reduced process costs mounting parts on PCBs

3. Reduces occupied space helping high density PCB mounting




<\$	et PTC Used>	<function of="" prf=""></function>	<competitive dev<="" th=""></competitive>
PRF PC Server	Power Supply	Overheat Sensing of FET	Temperature Fu
		Overheat Sensing of Power Supply	
	LCD	Overheat Sensing for Inverter Module of Backlight	
	AC Adapter	Overheat Sensing of FET	
	L	Overheat Sensing of Case	
TV Game	DC-DC Converter	Overheat Sensing of FET	
	AC Adapter	Overheat Sensing of FET	Temperature Fu
Video Camera	AC Adapter	Overheat Sensing of PCB	
Lighting	Dimmer	Overheat Sensing of Power Tr	Temperature Fu
Power Supply	DC-DC Converter	Overheat Sensing of FET	
Car Audio	AMP	Overheat Sensing of Power Hybrid IC]
	L	Overheat Sensing of Case	NTC Thermist
	LCD	Overheat Sensing for Inverter of Backlight	
Audio	AMP	Overheat Sensing of Power Hybrid IC	
Air Conditione	r	Overheat Sensing of Power Hybrid IC]
	DC Brushless Motor	Current Limitation & Overheat Sensing of Driver IC]
Refrigerator	DC Brushless Motor	Overheat Sensing of Driver IC	
PPC/Printer	DC Brushless Motor	Overheat Sensing of Driver IC	
Copy Machine	e Lamp	Overheat Sensing of Lamp Starter Circuit	

PRG18/21 Series Chip POSISTOR[®] for Overcurrent Prevention

Chip THERMISTORS prevent failure of apparatus due to excess current.

- 1.0603 and 0805 light weight
- 2. High gain simplifies circuit design
- 3. Free of contact noise and problems
- 4. Pb free plated terminations.
- 5. Sturdy construction resists mechanical vibration and shock.

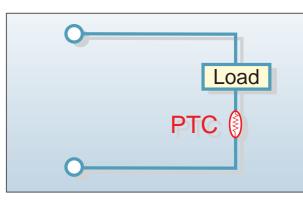



PRG Series Characteristics

Ratings - Lead Free Terminations

Part Number	Resistance (at +25°C)	Maximum Voltage	Maximum Current	Non-operating Current (at +60°C)	Operating Current (at -10°			
PRG21BC0R2MM1RA	0.20 ohm ±20%	6VDC	10A	500mA	2000mA			
PRG21BC4R7MM1RA	4.7 ohm ±20%	201/00	5A	100mA	400mA			
PRG21BC6R8MM1RA	6.8 ohm ±20%	20000	3.5A	80mA	320mA			
PRG21BB150MB1RK	15 ohm ±20%	201/00	1.6A	40mA	140mA			
PRG21BB220MB1RK	22 ohm ±20%	ZUVDC	1.1A	30mA	110mA			
PRG18BB330MB1RB	33 ohm ±20%		350mA	25mA	85mA			
PRG18BB470MB1RB	47 ohm ±20%		300mA	20mA	75mA			
PRG18BB101MB1RB	100 ohm ±20%	24VDC	200mA	15mA	55mA			
PRG18BB221MB1RB	220 ohm ±20%		90mA	10mA	35mA			
PRG18BB471MB1RB	470 ohm ±20%		40mA	7mA	25mA			
	PRG21BC0R2MM1RA PRG21BC4R7MM1RA PRG21BC6R8MM1RA PRG21BB150MB1RK PRG21BB220MB1RK PRG18BB330MB1RB PRG18BB470MB1RB PRG18BB101MB1RB PRG18BB221MB1RB	Part Number Resistance (at +25°C) PRG21BC0R2MM1RA 0.20 ohm ±20% PRG21BC4R7MM1RA 4.7 ohm ±20% PRG21BC6R8MM1RA 6.8 ohm ±20% PRG21BB150MB1RK 15 ohm ±20% PRG21BB220MB1RK 22 ohm ±20% PRG18BB330MB1RB 33 ohm ±20% PRG18BB470MB1RB 47 ohm ±20% PRG18BB101MB1RB 100 ohm ±20% PRG18BB221MB1RB 220 ohm ±20%	Part Number Resistance (at +25°C) Maximum Voltage PRG21BC0R2MM1RA 0.20 ohm ±20% 6VDC PRG21BC4R7MM1RA 4.7 ohm ±20% 20VDC PRG21BC6R8MM1RA 6.8 ohm ±20% 20VDC PRG21BB150MB1RK 15 ohm ±20% 20VDC PRG21BB220MB1RK 22 ohm ±20% 20VDC PRG18BB330MB1RB 33 ohm ±20% 20VDC PRG18BB470MB1RB 47 ohm ±20% 24VDC PRG18BB101MB1RB 100 ohm ±20% 24VDC	Part Number Resistance (at +25°C) Maximum Voltage Maximum Current PRG21BC0R2MM1RA 0.20 ohm ±20% 6VDC 10A PRG21BC4R7MM1RA 4.7 ohm ±20% 20VDC 5A PRG21BC6R8MM1RA 6.8 ohm ±20% 20VDC 3.5A PRG21BB150MB1RK 15 ohm ±20% 20VDC 1.6A PRG21BB220MB1RK 22 ohm ±20% 20VDC 1.1A PRG18BB330MB1RB 33 ohm ±20%	Part Number Resistance (at +25°C) Maximum Voltage Maximum Current Non-operating Current (at +60°C) PRG21BC0R2MM1RA 0.20 ohm ±20% 6VDC 10A 500mA PRG21BC0R2MM1RA 0.20 ohm ±20% 6VDC 10A 500mA PRG21BC4R7MM1RA 4.7 ohm ±20% 20VDC 5A 100mA PRG21BC6R8MM1RA 6.8 ohm ±20% 20VDC 3.5A 80mA PRG21BB150MB1RK 15 ohm ±20% 20VDC 1.6A 40mA PRG21BB220MB1RK 22 ohm ±20% 20VDC 1.1A 30mA PRG18BB330MB1RB 33 ohm ±20% 350mA 25mA PRG18BB470MB1RB 47 ohm ±20% 300mA 20mA PRG18BB101MB1RB 100 ohm ±20% 24VDC 200mA 15mA PRG18BB221MB1RB 220 ohm ±20% 90mA 10mA			




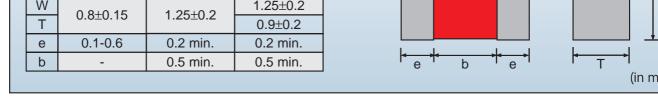


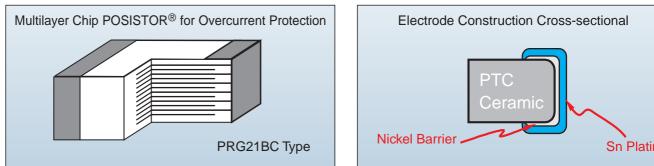



Data here are reference only. Specifications available upon request. Product to be evaluated, confirmed by the user before actual use. Description here may be revised without notice.

POSISTOR[®] Ideas

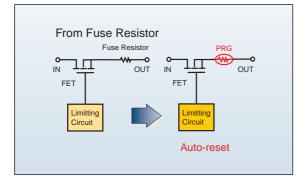


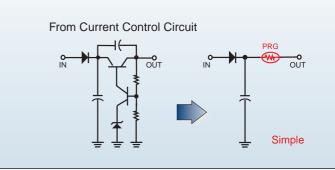

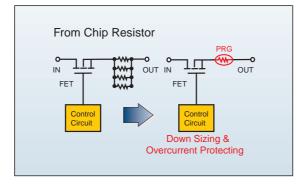

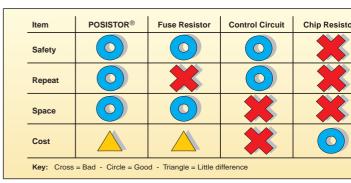




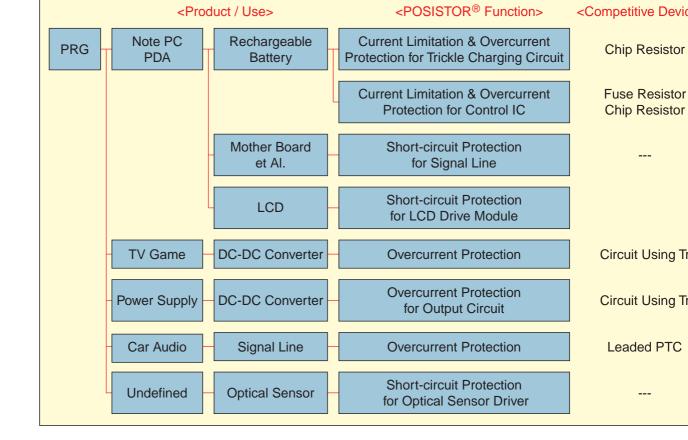

Chip NTC Thermistor NCP series

- 1. A common relationship between Resistance and B constant in all sizes (0201/ 0402/ 0603/ 0805) offers convenience when downsizing.
- 2. No lead contained (Pb free).
- 3. Tight resistance tolerance of $\pm 1\%$ (Code F) available on 10k ohm (0402, 0603), 47k ohm (0603) and 100k ohm (0603) products.
- 4. High soldering heat resistant
- 5. High humidity resistant due to unique inner electrodes.

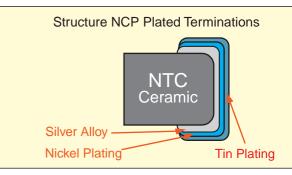

		I	1	-
	NCP03 (0201 size)	NCP15 (0402 size)	NCP18 (0603 size)	NCP21 (0805 size
L	0.60±0.03	1.00±0.05	1.60±0.15	2.00±0.20
w	0.210.02	0.5010.05	0.8010.45	1.25±0.20
Т	0.3±0.03	0.50±0.05	0.80±0.15	0.85±0.15
е	0.10-0.20	0.15-0.35	0.20-0.60	0.20-0.70
	т	(0201 size) L 0.60±0.03 W 0.3±0.03 T 0.400000	(0201 size) (0402 size) L 0.60±0.03 1.00±0.05 W 0.3±0.03 0.50±0.05 T 0.400000 0.450000	(0201 size) (0402 size) (0603 size) L 0.60±0.03 1.00±0.05 1.60±0.15 W 0.3±0.03 0.50±0.05 0.80±0.15



Resistance		02011	VCPU3	-		0402 NGF 15			
at 25°C	B-Constant	Part Number	B-Constant	Part Number	B-Constant	Part Number	B-Constant	Part Num	
11 ohm	2750 K	NCP03YS110*	-	-	-	-	-	-	
22 ohm	2750 K	NCP03YS220*	-	-	3100 K	NCP15XC220*	-	-	
33 ohm	2750 K	NCP03YS330*	-	-	3100 K	NCP15XC330*	-	-	
47 ohm	2750 K	NCP03YS470*	-	-	3100 K	NCP15XC470*	-	-	
68 ohm	2750 K	NCP03YS680*	-	-	3100 K	NCP15XC680*	-	-	
100 ohm	2750 K	NCP03YS101*	-	-	3250 K	NCP15XF101*	-	-	
150 ohm	(3100 K	NCP03XC151*	-	-	3250 K	NCP15XF151*	-	-	
220 ohm	(3100 K	NCP03XC221*	-	-	3500 K	NCP15XM221*	-	-	
330 ohm	(3100 K	NCP03XC331*	-	-	3500 K	NCP15XM331*	-	-	
470 ohm	(3100 K	NCP03XC471*	-	-	3650 K	NCP15XQ471*	-	-	
680 ohm	(3100 K	NCP03XC681*	-	-	3650 K	NCP15XQ681*	-	-	
1.0k ohm	(3500 K	NCP03XM102*	-	-	3650 K	NCP15XQ102*	-	-	
1.5k ohm	(3500 K	NCP03XM152*	-	-	3950 K	NCP15XW152*	-	-	
2.2k ohm	(3500 K	NCP03XM222*	-	-	3950 K	NCP15XW222*	-	-	
3.3k ohm	(3500 K	NCP03XM332*	-	-	3950 K	NCP15XW332*	-	-	
4.7k ohm	(3500 K	NCP03XM472*	-	-	3500 K	NCP15XM472*	-	-	
6.8k ohm	3380 K	NCP03XH682*	-	-	3950 K	NCP15XW682*	-	-	
10k ohm	3380 K	NCP03XH103*	-	-	3380 K	NCP15XH103*	3900 K	NCP15XV	
15k ohm	3380 K	NCP03XH153*	-	-	3950 K	NCP15XW153*	-	-	
22k ohm	3380 K	NCP03XH223*	-	-	3950 K	NCP15XW223*	4485 K	NCP15WL	
33k ohm	4250 K	NCP03WF333*	-	-	4050 K	NCP15WB333*	4485 K	NCP15WL	
47k ohm	4050 K	NCP03WB473*	4485 K	NCP03WL473*	4050 K	NCP15WB473*	4485 K	NCP15WL	
68k ohm	4250 K	NCP03WF683*	4485 K	NCP03WL683*	4150 K	NCP15WD683*	4485 K	NCP15WL	
100k ohm	4250 K	NCP03WF104*	4485 K	NCP03WL104*	4250 K	NCP15WF104*	4485 K	NCP15WL	
150k ohm	-	-	4485 K	NCP03WL154*	4500 K	NCP15WM154*	4485 K	NCP15WL	
220k ohm	-	-	4485 K	NCP03WL224*	4500 K	NCP15WM224*	-	-	
330k ohm	(4750 K	NCP03WQ334*	-	-	-	-	-	-	
470k ohm	(4750 K	NCP03WQ474*	-	-	4500 K	NCP15WM474*	-	-	
680k ohm	(4750 K	NCP03WQ684*	-	-	-	-	-	-	
1.0M ohm	(4750 K	NCP03WQ105*	-	-	-	-	-	-	
Operating Temp.	-40 to +125°C					-40 to +125°C			
Dissipation Constant	Approx. 1.0 mW/°C Approx. 1.0 mW/°C								
P/N in End		05	RL		03RC				
Packaging	15 kpcs./reel				10 kpcs./reel				
Certified UL1434		· · · · ·	-		Done -				

Recommended types

Coming soon!

* Resistance tolerance codes: F= \pm 1%, E= \pm 3%, J= \pm 5%, K= \pm 10%

10k ohm, 47k ohm, 100k ohm type have Tight Tolerance Type (±1%: NCP18XH103F03RB, NCP15XH103F03RC, NCP18WB473F10RB, NCP15WB473F03RC, NCP18WF104F12RB, NCP15WF104F03RC)



Resistance		0003 1				
at 25°C	B-Constant	Part Number	B-Constant	Part Number	B-Constant	Part Number
11 ohm	-	-	-	-	-	-
22 ohm	-	-	-	-	-	-
33 ohm	-	-	-	-	-	-
47 ohm	-	-	-	-	-	-
68 ohm	-			-	-	-
100 ohm	3250 K	250 K NCP18XF101*		-	-	-
150 ohm	3250 K	50 K NCP18XF151*		-	-	-
220 ohm	3500 K	NCP18XM221*	-	-	3500 K	NCP21XM221*
330 ohm	3500 K	NCP18XM331*	-	-	-	-
470 ohm	3650 K	NCP18XQ471*	-	-	3650 K	NCP21XQ471*
680 ohm	3650 K	NCP18XQ681*	-	-	-	-
1.0k ohm	3650 K	NCP18XQ102*	-	-	3650 K	NCP21XQ102*
1.5k ohm	3950 K	NCP18XW152*	-	-	-	-
2.2k ohm	3950 K	NCP18XW222*	-	-	3950 K	NCP21XW222*
3.3k ohm	3950 K	NCP18XW332*	-	-	-	-
4.7k ohm	3500 K	NCP18XM472*	-	-	3500 K	NCP21XM472*
6.8k ohm	3950 K	3950 K NCP18XW682*		-	-	-
10k ohm	3380 K	NCP18XH103*	3900 K	NCP18XV103*	3900 K	NCP21XV103*
15k ohm	3950 K	NCP18XW153*	-	-	3950 K	NCP21XW153*
22k ohm	3950 K	950 K NCP18XW223*		-	3950 K	NCP21XW223*
33k ohm	4050 K	NCP18WB333*	-	-	4050 K	NCP21WB333*
47k ohm	4050 K	NCP18WB473*	-	-	4050 K	NCP21WB473*
68k ohm	4150 K	NCP18WD683*	-	-	-	-
100k ohm	4250 K	NCP18WF104*	-	-	4250 K	NCP21WF104*
150k ohm	4500 K	NCP18WM154*	-	-	-	-
220k ohm	4500 K	NCP18WM224*	-	-	-	-
330k ohm	-	-	-	-	-	-
470k ohm	4500 K	NCP18WM474*	-	-	-	-
680k ohm	-	-	-	-	-	-
1.0M ohm	-	-	-	-	-	-
Operating Temp.		-40 to	-40 to +125°C			
Dissipation Constant		Approx. 1	Approx. 2.0 mW/°C			
P/N in End		03	03RA			
Packaging		4 kpc	4 kpcs./reel			
Certified UL1434		Do		Done		


Recommended types

Coming soon!

* Resistance tolerance codes: F= \pm 1%, E= \pm 3%, J= \pm 5%, K= \pm 10%

10k ohm, 47k ohm, 100k ohm type have Tight Tolerance Type (±1%: NCP18XH103F03RB, NCP15XH103F03RC, NCP18WB473F10RB, NCP15WB473F03RC, NCP18WF104F12RB, NCP15WF104F03RC)



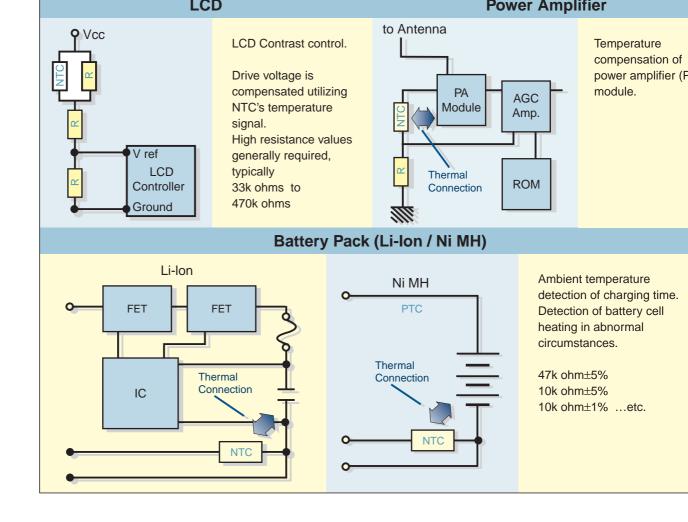

More Popular Applications of Chip NTCs





∧ Note:

1. Export Control

(For customers outside Japan)

No muRata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation otherwise contribution to (1) any weapons (Weapons of Mass Destruction (nuclear, chemical or biological weapons or missiles) or conventional weapon goods or systems specially designed or intended for military end-use or utilization by military end-users. For customers in Japan>

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is for export.

- 2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require es high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for applications other than those specified in this catalog.
 - 1 Aircraft equipment
 - 2 Aerospace equipment 3 Undersea equipment (4) Power plant equipment
 - **(5)** Medical equipment
- 6 Transportation equipment (vehicles, trains, ships, etc.) (8) Disaster prevention / crime prevention equipment
- ⑦ Traffic signal equipment
- (9) Data-processing equipment 1 Application of similar complexity and/or reliability requirements to the applications listed above 3. Product specifications in this catalog are as of January 2006. They are subject to change or our products in it may be discontinued without advance
- Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives product engineers.
- 4. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications transact the approval sheet for product specifications before ordering. Especially, please read rating and ACAUTION (for storage, operating, rating, so mounting and handling) in them to prevent smoking and/or burning, etc.
- 5. You are able to read a detailed specification in the website of Search Engine (http://search.murata.co.jp/) or catalog library (http://www.murata.com/o before to require our product specification or to transact the approval sheet for product specification.
- 6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information desc contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights made above under licenses without our consent.
- 7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.

muRata Murata Manufacturing Co., Ltd.

http://www.murata

1-10-1, Higashi Kotari, Nagaokakyo-shi, Kyoto 617-8555, Japan Phone: 81-75-951-9111

International Division 2-29-12, Shibuya, Shibuya-ku, Tokyo 150-0002, Japan Phone: 81-3-5469-6123 Fax: 81-3-5469-6155 E-mail: intl@murata.co.jp





This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download Daily Updated Database 100% Free Datasheet Search Site 100% Free IC Replacement Search Site Convenient Electronic Dictionary Fast Search System www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company